
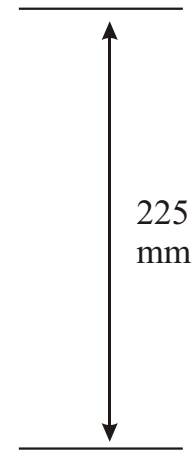


FLAMEPROOF POWER SUPPLY

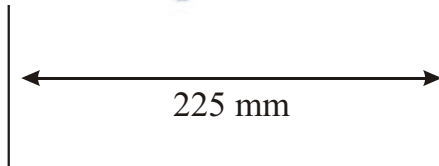

Depth : 150 mm

Input supply : 190 to 250 VAC, 50 Hz

Output supply : 24 / 12 VDC

Output current : 1 , 2 , 3, 4 & 5 Amp. Max.

Short circuits protection : Yes

Enclosure : Aluminum, LM6

Coating : Powder coted

Weight : 5 kg. Approx.

Termination : 2.5 to 4 mm sq.

Entry : 4 x 4 [4 entry each side] 3/4" ET.

Mounting : Wall / slab mounting type

Model : FIPS01 [1 Amp.]

FIPS02 [2 Amp.]

FIPS03 [3 Amp.]

FIPS04 [4 Amp.]

FIPS05 [5 Amp.]



FI

Flameproof Instrumentation

E / 14 , Anand nagar MIDC, Ambemath (E), Dist: Thane, Maharashtra.

Tital : **FLAMEPROOF POWER SUPPLY**

MODEL NO. : **FIPS**