


FLAMEPROOF HOOTER



Salient features :

- Model :** FI / FH /19
- Aux. Supply :** 230 VAC OR 24VDC
- Power consumption :** 450 mA @ 24VDC & 80 mA @ 230VAC
- Audio range :** 110 db @ 400 meter
- Operating Temp. :** Up to 55°C
- Humidity :** 90 % at 40°C
- Enclosure :** LM6, Aluminum
- Weather protection :** IP 65
- Coating :** Powder coated
- Dimension :** As per drawing
- Application :** Hazardous area
- Gas group :** IIA, IIB & IIC, Zone 1 & Zone 2
- Weight :** 6 to 7 Kg aprox.
- Terminals :** Up to 2.5 sqmm.
- Cable entry:** Max. 6 Nos. 3/4" ET
- Mounting :** Wall mounting / slab mounting type
- Flasher :** OPTIONAL [LED TYPE]

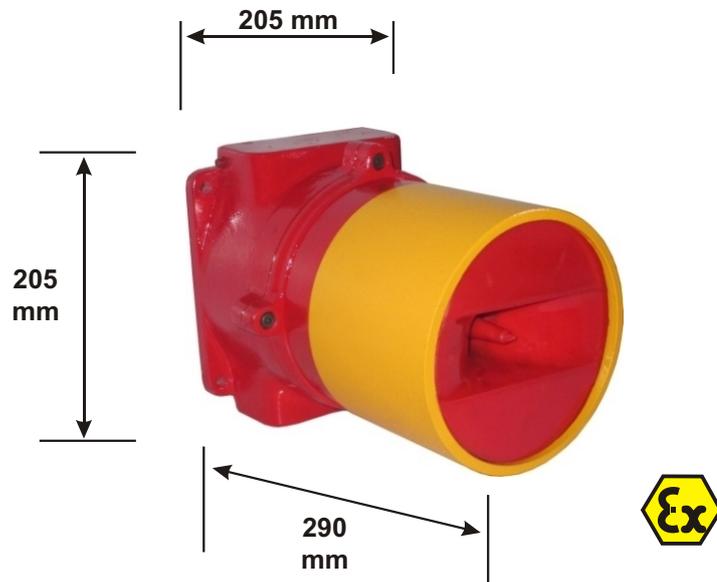

Flameproof Instrumentation

E / 14 , Anand nagar MIDC, Ambarnath (E), Dist: Thane, Maharashtra.
e-mail : sales@flameproof.co.in www.flameproof.co.in