


FLAMEPROOF SPEAKER

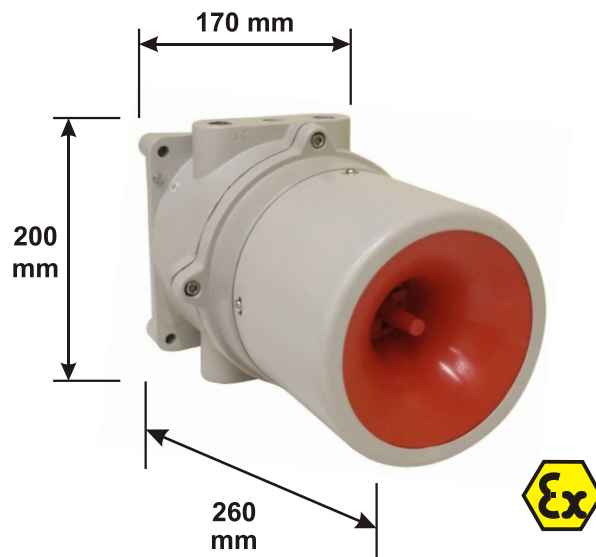

Salient features :

Aux. Supply : Input from amplifier [2 wire type for 100VAC line transformer]

Resistance : 16 Ohm.

Watt : UP TO 30 Watt [RMS]

Frequency : 20 Hz to 20 Khz

Internal circuitry : 100VAC line transformer optional

Operating Temp. : Up to 55^oC

Humidity : 90 % at 40^oC

Enclosure : LM6, Aluminum

Coating : Powder coated

Dimension : As per drawing

Application : Hazardous area

Gas group : IIA, IIB, Zone 1 & Zone 2

Weight : 7.9 to 8 Kg.

Terminals : Up to 2.5 sqmm.

Cable entry: Max. 6 Nos. 3/4" ET

Mounting : Wall mounting / slab mounting type



Flameproof Instrumentation

E / 14 , Anand nagar MIDC, Ambarnath (E), Dist: Thane, Maharashtra.
Mail : sales@flameproof.co.in www.flameproof.co.in