


FLAMEPROOF FLASHER



Salient features :

- Aux. Supply :** 230 VAC, 110VAC OR 24VDC
- Current consumption :** 25 mA max for 24VDC & 25 mA max for 230VAC
- Operating Temp. :** Up to 55°C
- Humidity :** 90 % at 40°C
- Enclosure :** LM6, Aluminum
- Coating :** Powder coated
- Dimension :** As per drawing
- Application :** Hazardous area
- Gas group :** IIA, IIB & IIC, Zone 1 & Zone 2
- Weight :** 6 Kg MAX.
- Terminals :** Up to 2.5 sqmm.
- Cable entry :** Max. 3 Nos. 3/4" ET
- Mounting :** Wall mounting / slab mounting type
- Flasher :** LED
- Frequency :** 60 Flasher per minute
- Hardware :** SS
- Flasher Color :** Red, Green, Amber, Blue or White.

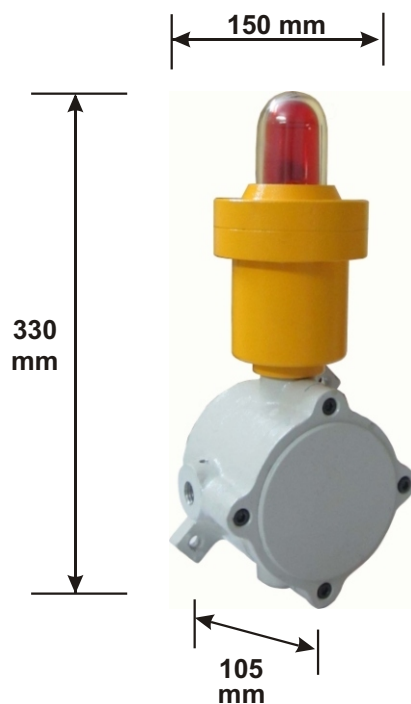

Flameproof Instrumentation

E / 14 , Anand nagar MIDC, Ambarnath (E), Dist: Thane, Maharashtra.
e-mail : sales@flameproof.co.in www.flameproof.co.in