


# FLAMEPROOF HOOTER WITH FLASHER

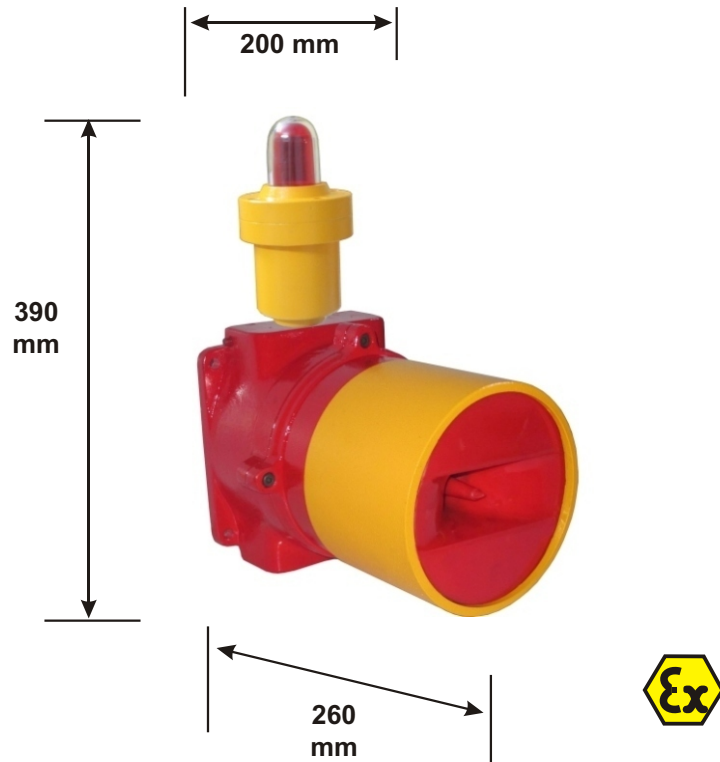

## **Salient features :**

**Aux. Supply :** 230 VAC, 110VAC OR 24VDC

**Power consumption :** 450 mA @ 24VDC & 85 mA @ 230VAC

**Audio range :** 110 db

**Operating Temp. :** Up to 55 °C

**Humidity :** 90 % at 40 °C

**Enclosure :** LM6, Aluminum

**Weather protection :** IP 65

**Coating :** Powder coated

**Dimension :** As per drawing

**Application :** Hazardous area

**Gas group :** IIA, IIB & IIC, Zone 1 & Zone 2

**Weight :** 9 Kg MAX.

**Terminals :** Up to 2.5 sqmm.

**Cable entry:** Max. 6 Nos. 3/4" ET

**Mounting :** Wall mounting / slab mounting type

**Flasher :** LED or Xenon type.



FI

**Flameproof Instrumentation**

E / 14 , Anand nagar MIDC, Ambarnath ( E ), Dist: Thane, Maharashtra.  
e-mail : sales@flameproof.co.in      www.flameproof.co.in