


FLAMEPROOF LED TUBE LIGHT FITTING

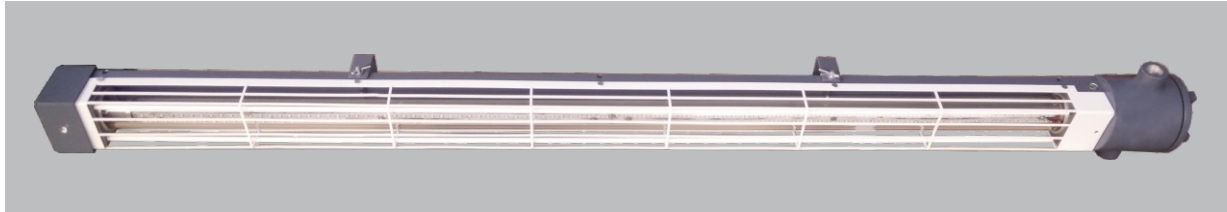

Salient features :

Aux. Supply : 230 VAC

Watt : 20 Watt for Single, 40 Watt for double

Operating Temp. : Up to 55°C

Humidity : 90% at 40°C

Enclosure : LM6, Aluminum

Coating : Powder coted

Dimension : 4 Feet

Application : Hazardous area

Gas group : IIA, IIB, IIC, Zone 1 & Zone 2

Weight : 9.5 Kg. MAX.

Terminals : Up to 2.5 sqmm.

Cable entry : Max. 2 Nos. M20

Mounting : Wall mounting / Slab mounting type



FI

Flameproof Instrumentation

E / 14 , Anand nagar MIDC, Ambarnath (E), Dist: Thane, Maharashtra.
Mail : sales@flameproof.co.in www.flameproof.co.in