


Flameproof LED Well Glass Light Fitting



Salient features :

- Moc :** LM 6, ALLUMINIUM, IP 65
- Weight :** 9 Kg.
- Light :** High bright LED
- Light colour :** High bright Cool white LED
- Power :** Available in 30 watt, 45 watt & 60 watt @ 230VAC, 50Hz
- CRI :** 83.5
- Lumen :** 30 watt : 3900 40 watt : 5200 60 watt : 7800
- THD :** Less than 25%
- Power factor:** 0.97 & above
- Viewing angle:** 120°
- Variation of input :** 200 to 264 VAC
- Colour temperature :** 6500K
- Life span :** 50000 hours
- Hardware :** SS
- Coating :** Powder coated
- Terminals :** Suitable up to 4 sq.mm wire
- Operating temp. :** 50° C
- Cable entry :** Max. 2 Nos.
- Gas group :** IIA, IIB, Zone 1 and Zone 2

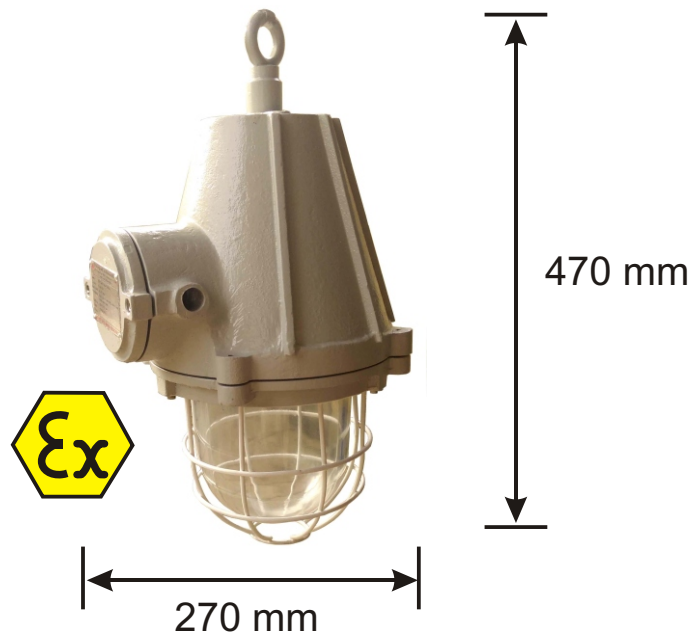

FI

Flameproof Instrumentation

E / 14 , Anand nagar MIDC, Ambarnath (E), Dist: Thane, Maharashtra.
e-mail : sales@flameproof.co.in www.flameproof.co.in