


Flameproof Intrinsically Safe Buzzer



	SALIENT FEATURES
Supply voltage options	230 VAC / 24VDC (select any one)
Current	30 mA @ 24VDC & 50 mA @ 230VAC
Sound Level	95 dB
Enclosure	LM 6, Aluminum
Coating	Powder coated
Dimension	As per drawing
Applications	Hazardous area
Gas group	IIA, IIB & IIC, Zone 1 & Zone 2
Weight	5 Kg Max
Terminals	Up to 2.5 Sqmm
Mounting	Wall mounting / slab mounting type

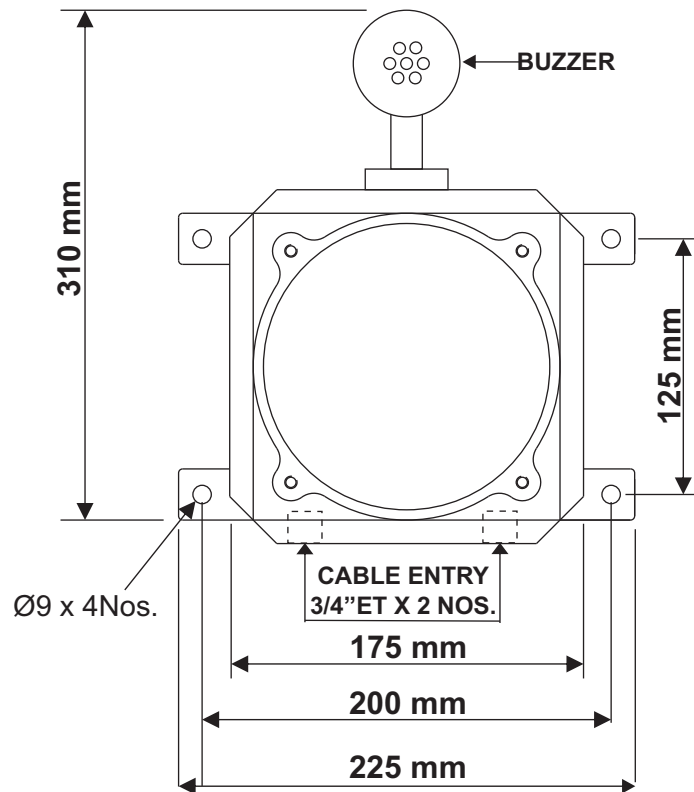

Flameproof Instrumentation

Made in



Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambarnath (E), Dist. Thane, Maharashtra, India — 421 506.,

sales@flameproof.co.in

9321160178

www.flameproof.co.in