


Flameproof LED Flood Light / Bulkhead 40 Watt



	SALIENT FEATURES
Input	200 to 264 VAC
Wattage	40 Watts
Moc	LM 6, Aluminum, IP 65
Weight	7.5 Kg
Light	High bright LED
Light colour	High bright cool white LED
CRI	83.5
Lumen	5200
Power factor	0.97 & above
THD	Less than 25%
Viewing angle	120°
Colour Temperature	6500K
LED Life span	50,000 Hrs
Hardware	SS
Coating	Powder coated
Terminal	Suitable up to 4 sq. mm. wire
Operating Temp.	50 °C
Cable entry	3/4" NPT or 1/2" NPT or M20 (select any one)
Gas group	IIA, IIB, Zone 1 and Zone 2

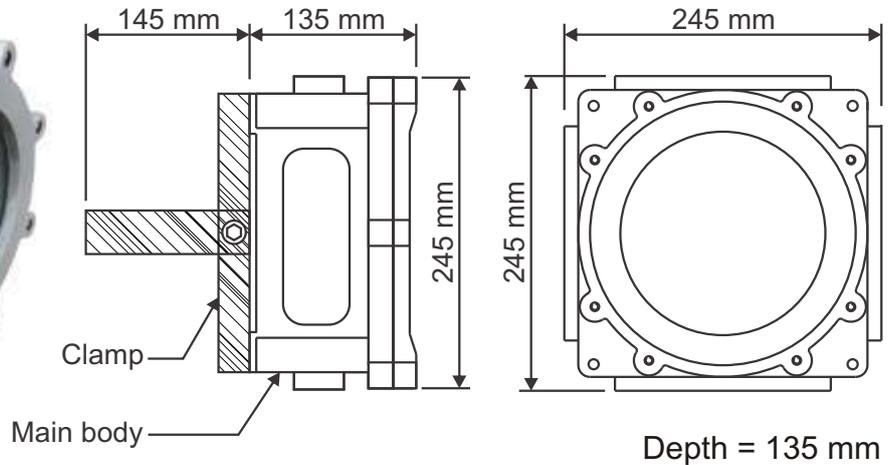

Flameproof Instrumentation

Made in



Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambarnath (E), Dist. Thane, Maharashtra, India — 421 506.,


sales@flameproof.co.in

9321160178



www.flameproof.co.in

Flameproof LED Flood Light / Bulkhead 60 Watt

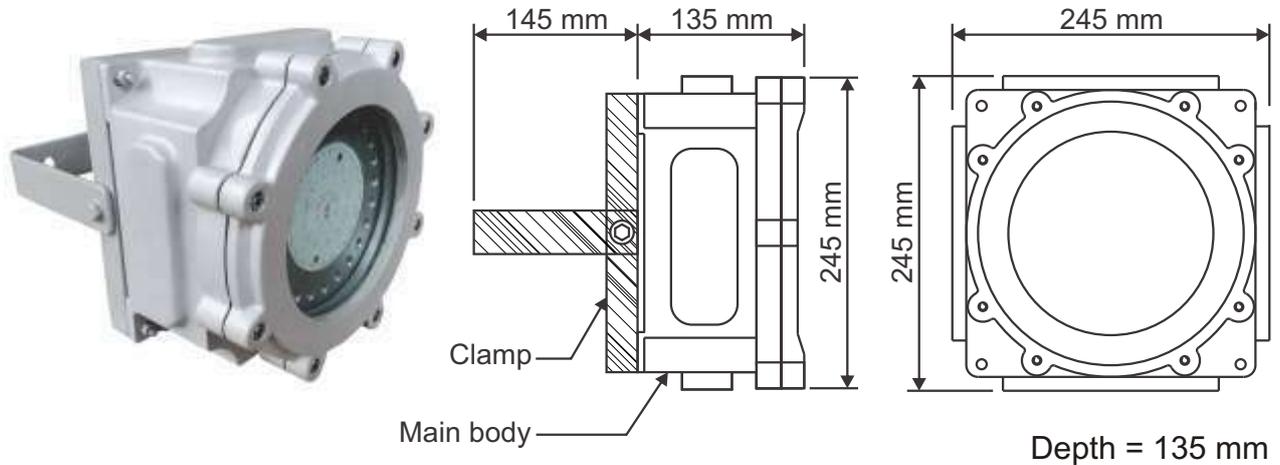

	SALIENT FEATURES
Input	200 to 264 VAC
Wattage	60 Watts
Moc	LM 6, Aluminum, IP 65
Weight	7.5 Kg
Light	High bright LED
Light colour	High bright cool white LED
CRI	83.5
Lumen	7800
Power factor	0.97 & above
THD	Less than 25%
Viewing angle	120°
Colour Temperature	6500K
LED Life span	50,000 Hrs
Hardware	SS
Coating	Powder coated
Terminal	Suitable up to 4 sq. mm. wire
Operating Temp.	50 °C
Cable entry	M20, 3/4" NPT & 1/2" NPT (select any one)
Gas group	IIA, IIB, Zone 1 and Zone 2



Flameproof Instrumentation

Made in



Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambarnath (E), Dist. Thane, Maharashtra, India — 421 506.,


sales@flameproof.co.in

9321160178



www.flameproof.co.in

Flameproof LED Flood Light / Bulkhead 100 Watt

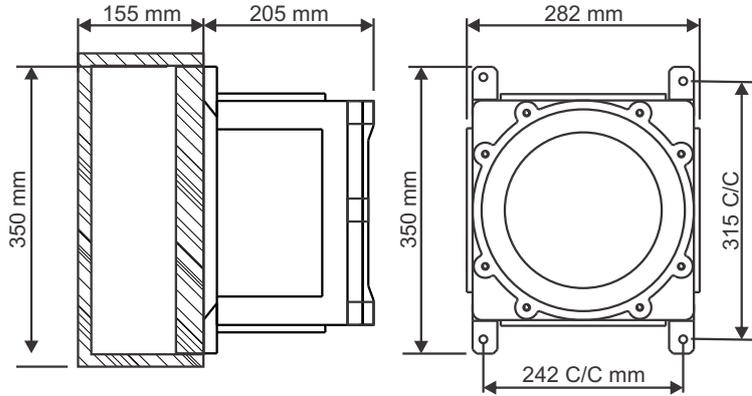

Depth = 205 mm

	SALIENT FEATURES
Input	200 to 264 VAC
Wattage	100 Watts
Moc	LM 6, Aluminum, IP 65
Weight	12 Kg
Light	High bright LED
Light colour	High bright cool white LED
CRI	83.5
Lumen	13000
Power factor	0.97 & above
THD	Less than 25%
Viewing angle	120°
Colour Temperature	6500K
LED Life span	50,000 Hrs
Hardware	SS
Coating	Powder coated
Terminal	Suitable up to 4 sq. mm. wire
Operating Temp.	50 °C
Cable entry	M20, 3/4" NPT & 1/2" NPT (select any one)
Gas group	IIA, IIB, Zone 1 and Zone 2



Flameproof Instrumentation

Made in



Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambarnath (E), Dist. Thane, Maharashtra, India — 421 506.,

sales@flameproof.co.in

9321160178



www.flameproof.co.in