


Flameproof Well Glass Fitting



	SALIENT FEATURES
Power	Available in 40 watt, 45 watt, 60 watt, 100 watt @ 230VAC, 50Hz
Light	High bright LED
Light colour	High bright cool white LED
CRI	83.5
THD	Less than 25%
Power factor	0.97 & above
Viewing angle	120°
Variation of input	200 to 264 VAC
Operating Temp.	50°C
Hardware	SS
MOC	LM 6, Aluminum
Lumen	40 W : 5200, 45 W : 5850, 60 W : 7800, 100 W : 13000
Life Span	87000 hours
Coating	Powder coated
Application	Hazardous area
Gas group	IIA & IIB & Zone 1 & Zone 2
Weight	6 Kg Approx.
Terminals	Suitable for 4 sq.mm wire
Cable Entry	Maximum 2 No.

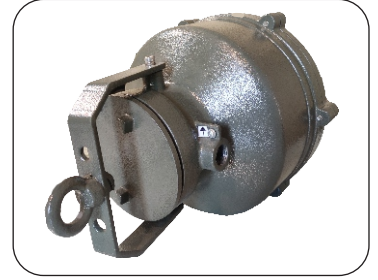

Flameproof Instrumentation

Made in



Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambarnath (E), Dist. Thane, Maharashtra, India — 421 506.


sales@flameproof.co.in

9321160178



www.flameproof.co.in

Dimensional Details

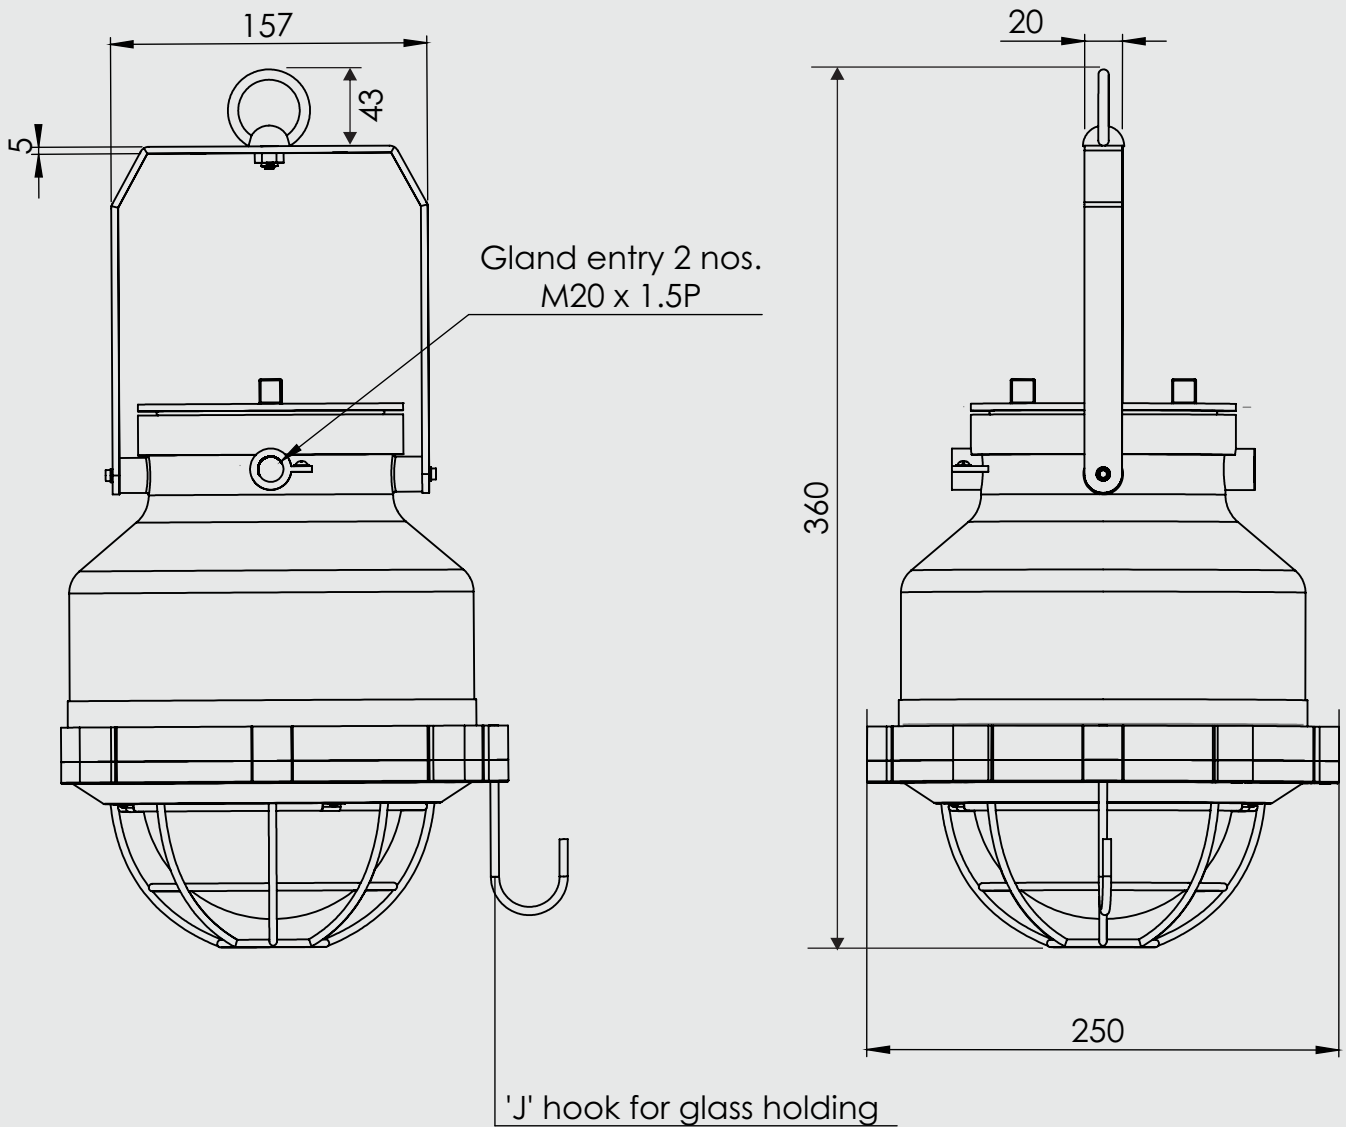

Flameproof Instrumentation

Made in



Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambarnath (E), Dist. Thane, Maharashtra, India — 421 506.


sales@flameproof.co.in

9321160178




www.flameproof.co.in

Mounting Details

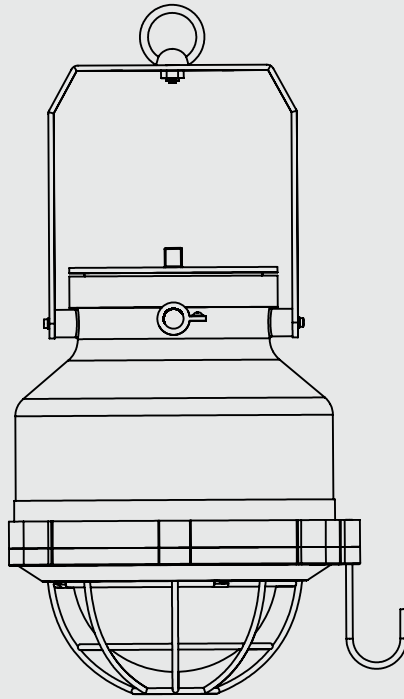

Hook Mounting

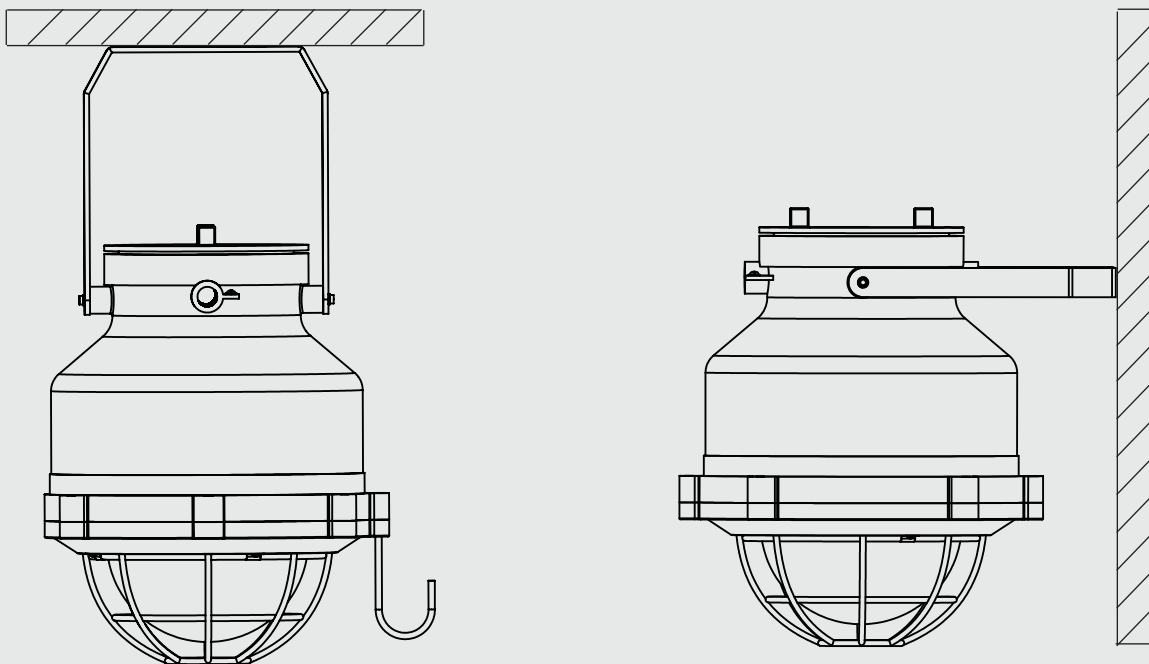

Ceiling / Wall Mounting



Flameproof Instrumentation

Made in



Flameproof Instrumentation

📍 Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambarnath (E), Dist. Thane, Maharashtra, India — 421 506.

✉ sales@flameproof.co.in

☎ 9321160178

🌐 www.flameproof.co.in