

Flameproof LED Tubelight



	SALIENT FEATURES
Aux. Supply	230 VAC
Wattage	18 Watt or 36 Watt
Operating Temp.	Up to 55 °C
Humidity	90% at 40°C
Light colour	High bright cool white LED
Viewing angle	120°
Moc	LM 6, Aluminum
Coating	Powder coated
Weight	9.5 Kg
Dimension	4 Feet
Terminals	Max. 2 Nos. - M 20
Application	Hazardous area
Gas group	IIA, IIB, IIC, Zone 1 and Zone 2
Mounting	Wall mounting / Slab mounting type



Flameproof Instrumentation

Made in



Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambarnath (E), Dist. Thane, Maharashtra, India — 421 506.,

sales@flameproof.co.in


9321160178



www.flameproof.co.in

Dimensional Details

FLAMEPROOF LED TUBE LIGHT

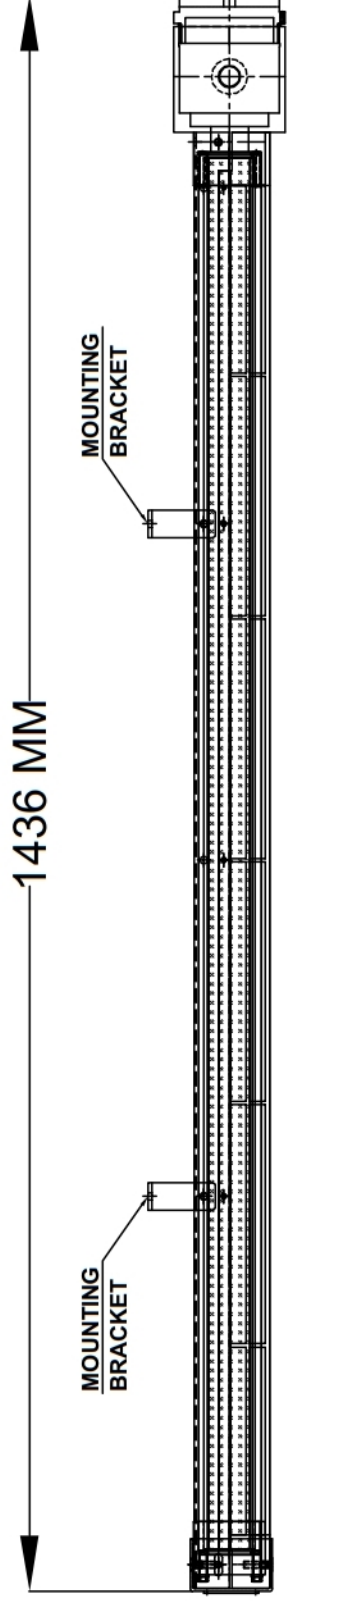

FLAMEPROOF INSTRUMENTATION



Flameproof Instrumentation



Made in

Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambemath (E), Dist. Thane, Maharashtra, India — 421 506.,

✉ sales@flameproof.co.in

☎ 9321160178



www.flameproof.co.in