


# Flameproof Voice Hooter / Fault Announcer

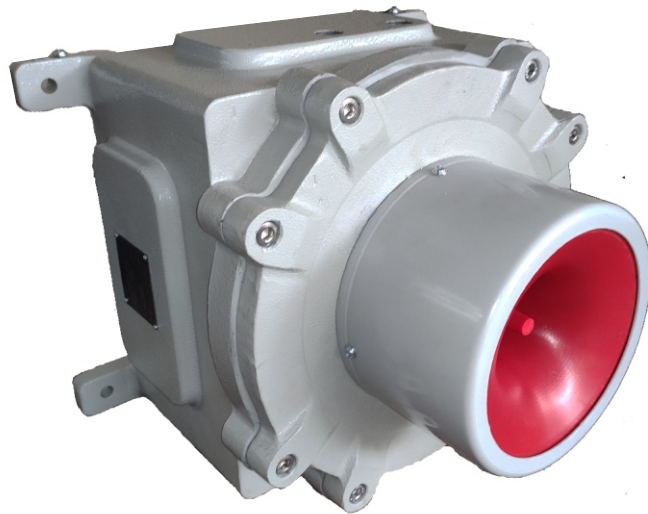

	SALIENT FEATURES
Aux. Supply	230VAC or 24VDC (select any one)
Voice type	Pre - recorded as per customized requirement
Current	142 mA @ 230 VAC or 950 mA @ 24VDC
Audio Range	100 dB - 103 dB (Varying due to voice output)
Operating Temp.	Up to 55°C
Humidity	90% at 40°C
Enclosure	LM6, Aluminum
Weather Protection	IP 65
Coating	Powder coated
Dimension	As per drawing
Applications	Hazardous area
Gas group	IIA & IIB, Zone 1 & Zone 2
Weight	17 Kg Max
Terminals	Up to 2.5 Sqmm
Cable Entry	1/2" NPT OR 3/4" NPT OR M20 (select any one)
Mounting	Wall mounting / slab mounting type

## Flameproof Instrumentation



Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambernath (E), Dist. Thane, Maharashtra, India — 421 506.,

sales@flameproof.co.in

9321160178

www.flameproof.co.in

# Dimensional Details

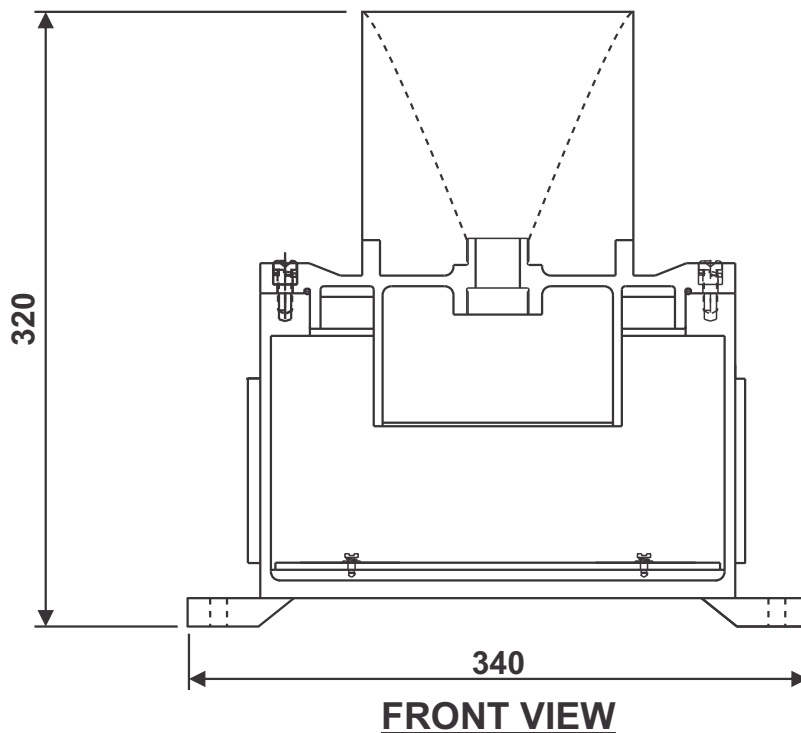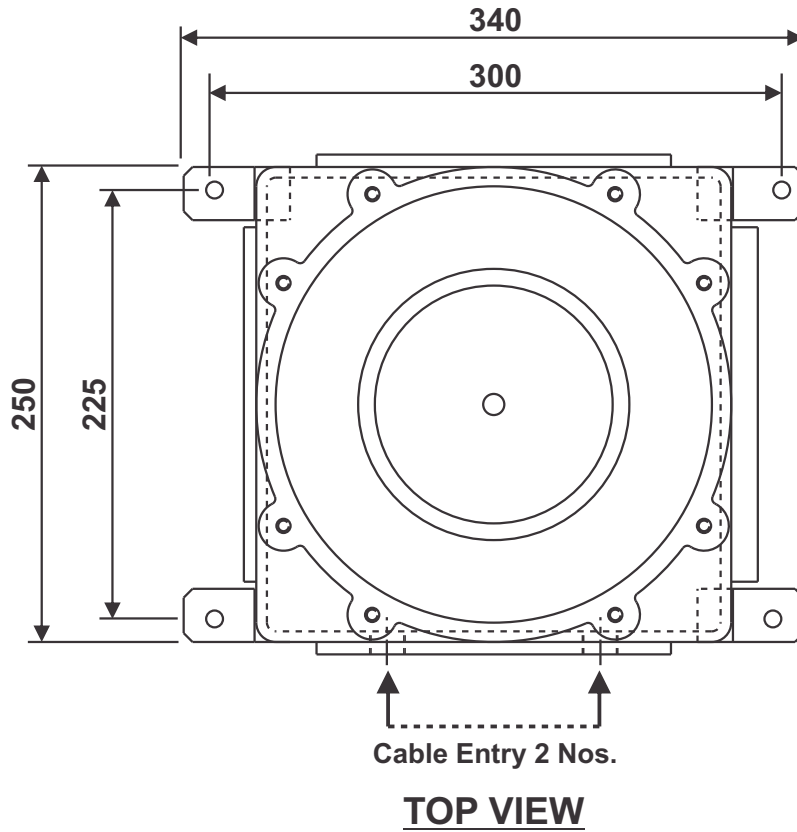

Flameproof Instrumentation

Made in 

Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambernath (E), Dist. Thane, Maharashtra, India — 421 506.,

sales@flameproof.co.in

9321160178

www.flameproof.co.in