





Model - FI/CSPK-NF-01 (10 Watt)

Model - FI/CSPK-OT-01 (30 Watt)

	SALIENT FEATURES
Aux. Supply	Input from amplifier (2 wire type for 100 VAC line transformer)
Resistance	4 Ohm
Watt	Up to 10 Watts (RMS)
Frequency	20 Hz to 20 KHz
Internal circuitry	100 VAC line transformer
Operating temp.	Up to 55°C
Humidity	90% at 40°C
Enclosure	LM 6, Aluminum
Coating	Power coated
Dimensions	As per drawing
Application	Hazardous area
Gas group	IIA, IIB, IIC, Zone 1 & Zone 2
Weight	5.5 to 6 Kg Max
Terminals	Up to 2.5 Sqmm
Cable Entry	Max 3 Nos.(Options M20 or 3/4" NPT or 1/2" NPT)
Mounting	Ceiling/Wall mounting type
Weather Protection	IP 65
No. of Tapings inside the speaker	5/10

	SALIENT FEATURES
Aux. Supply	Input from amplifier (2 wire type for 100 VAC line transformer)
Resistance	16 Ohm
Watt	Up to 30 Watts (RMS)
Frequency	20 Hz to 20 KHz
Internal circuitry	100 VAC line transformer
Operating temp.	Up to 55°C
Humidity	90% at 40°C
Enclosure	LM 6, Aluminum
Coating	Power coated
Dimensions	As per drawing
Application	Hazardous area
Gas group	IIA, IIB, IIC, Zone 1 & Zone 2
Weight	7.9 to 8 Kg Max
Terminals	Up to 2.5 Sqmm
Cable Entry	Max 3 Nos.(Options M20 or 3/4" NPT or 1/2" NPT)
Mounting	Ceiling/Wall mounting type
Weather Protection	IP 65
No. of Tapings inside the speaker	5 / 10 / 15 / 20 / 30


Flameproof Instrumentation









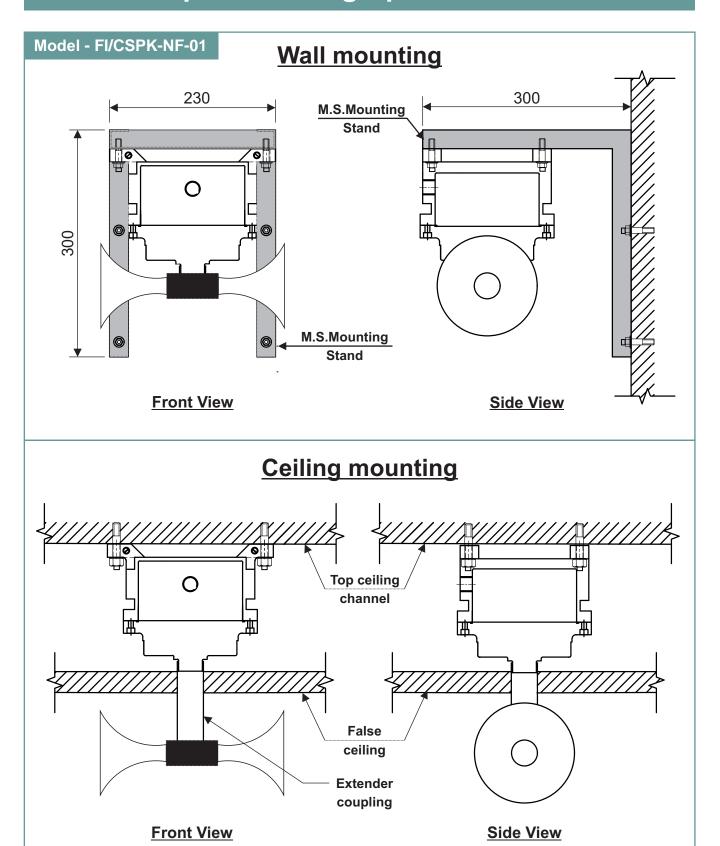



Flameproof Instrumentation


Made in 🐷



Flameproof Instrumentation





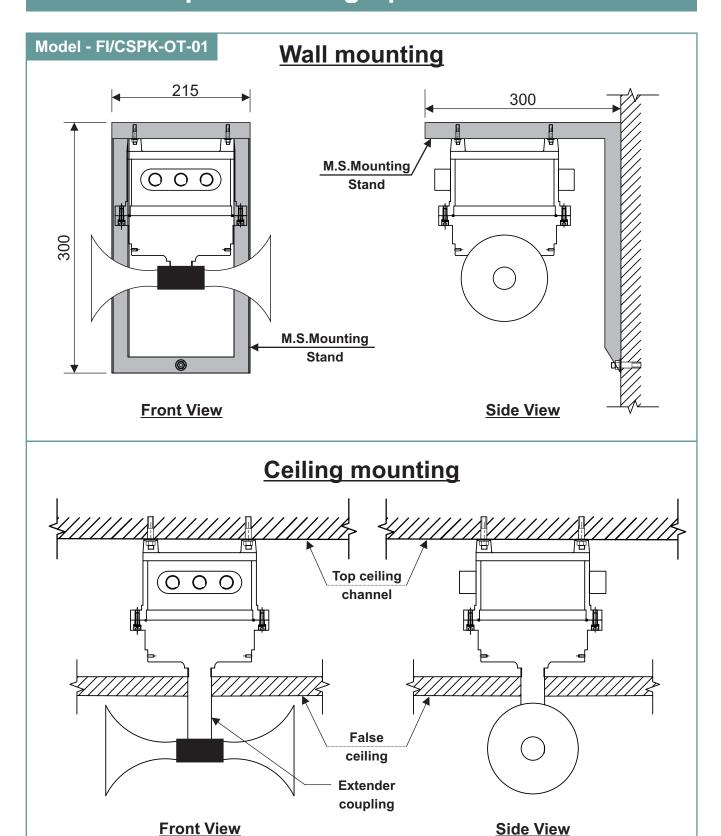



Flameproof Instrumentation

Made in 🥌



Flameproof Instrumentation











Wall mounting assembly drawing

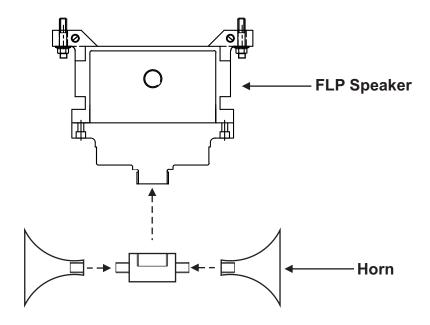

Ceiling mounting assembly drawing

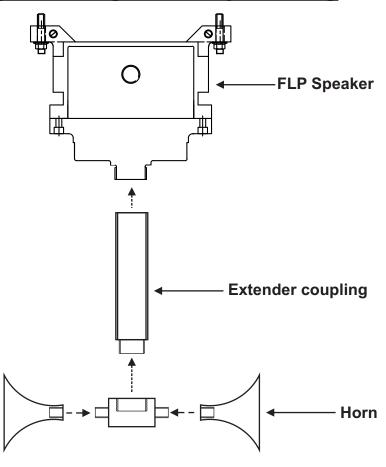



Flameproof Instrumentation

Made in 🐷



Flameproof Instrumentation

