Flameproof LED Mini Emergency Light

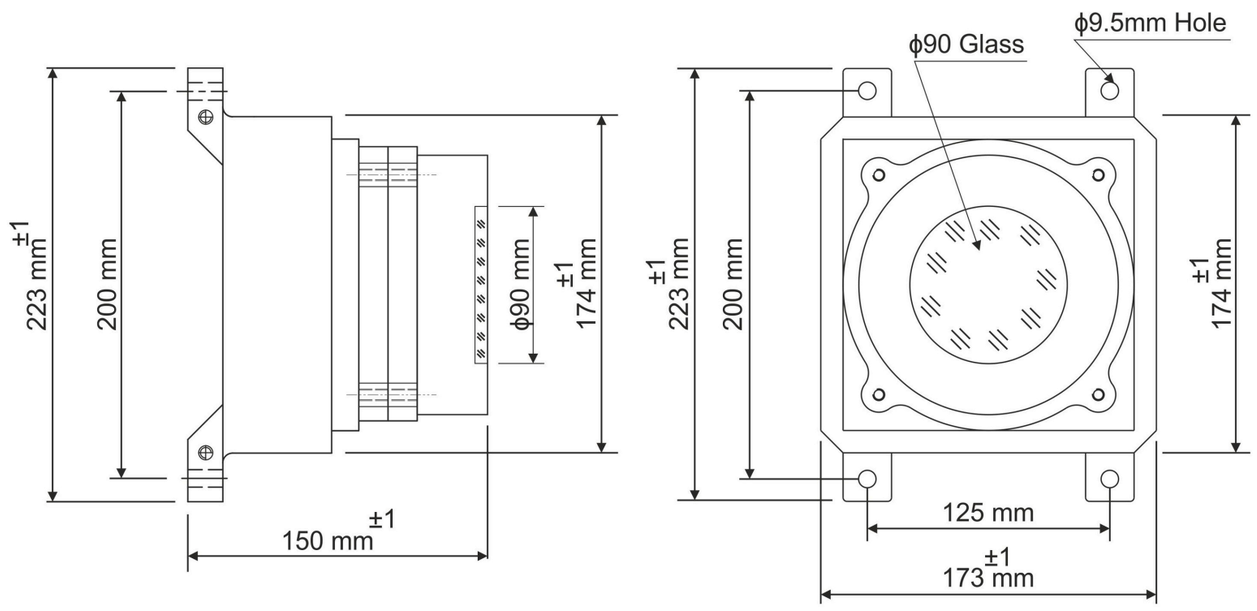

Depth = 150 mm

	SALIENT FEATURES
Input	230 VAC
Wattage	10 Watt max
MOC	Aluminium IP65
Weight	4 kg
Light	High Bright LED
Light Colour	High Bright Cool White LED
Battery Backup	120 minutes
Charging time	8 Hours, charger inbuilt in box
LED Heat Dispersion	Through internal thermal construction
Viewing angle	120°
Colour Temperature	6500K
LED Life Span	50,000 Hrs
Hardware	SS
Coating	Powder coated
Function type	Automatic ON when power supply OFF
Operating Temp.	Upto 50 °C
Cable entry	Max. 2 Nos . - M20 or 1/2 " NPT or 3/4" NPT (we give M20 by default)
Gas group	IIA, IIB, Zone 1 and Zone 2

Flameproof Instrumentation Made in

Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambernath (E), Dist. Thane, Maharashtra, India — 421 506.,

sales@flameproof.co.in 9321160178 www.flameproof.co.in

Product Photos

Flameproof Instrumentation

Made in

Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambernath (E), Dist. Thane, Maharashtra, India — 421 506.,

sales@flameproof.co.in

9321160178

www.flameproof.co.in