


Flameproof Gas Detector Alarm With Sound Cancellation



	SALIENT FEATURES
Aux. Supply	24 VDC / 12VDC (select any one)
Power Consumption	35 mA
Audio Range	90 dB
Operating Temp.	Up to 55°C
Humidity	90% at 40°C
Enclosure	LM 6, Aluminum
Weather Protection	IP 40
Coating	Powder coated
Dimension	As per drawing
Applications	Hazardous area
Gas group	IIA, IIB & IIC, Zone 1 & Zone 2
Weight	1.5 Kg
Process Connection	M20, 1/2" NPT or 3/4" NPT (select any one, we give M20 by default)
Mounting	Directly to gas detector
Sound Cancellation	By widget mechanism

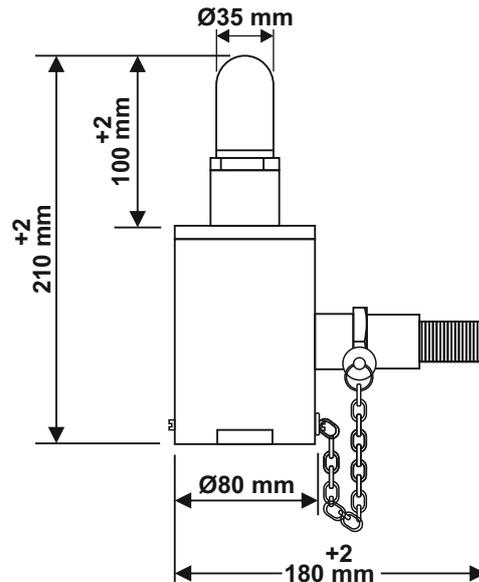

Flameproof Instrumentation

Made in



Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambarnath (E), Dist. Thane, Maharashtra, India — 421 506.,

sales@flameproof.co.in

9321160178



www.flameproof.co.in

Product Photos



Flameproof Instrumentation

Made in



Flameproof Instrumentation

Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambarnath (E), Dist. Thane, Maharashtra, India — 421 506.,

sales@flameproof.co.in

9321160178

www.flameproof.co.in