


Flameproof Buzzer



SALIENT FEATURES	
Supply voltage options	230 VAC / 24VDC (select any one)
Current	70 mA @ 24VDC & 50 mA @ 230VAC
Sound Level	95 dB
Optional Features	Sound cancellation facility
Enclosure	LM 6, Aluminum
Coating	Powder coated
Dimension	As per drawing
Applications	Hazardous area
Gas group	IIA, IIB & IIC, Zone 1 & Zone 2
Weight	3.5 Kg Max
Terminals	Up to 2.5 Sqmm
Mounting	Wall mounting / slab mounting type

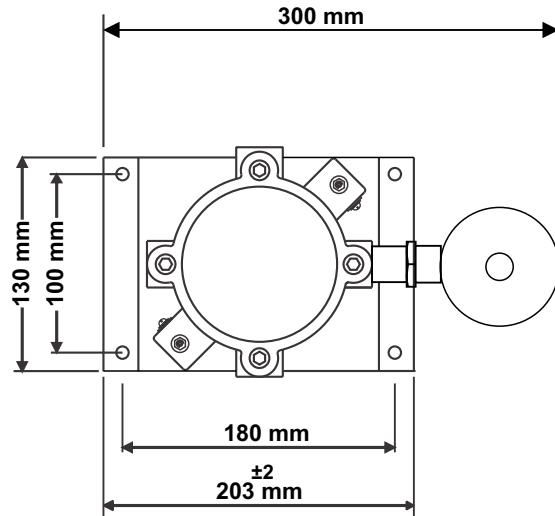

Flameproof Instrumentation

Made in



Flameproof Instrumentation



📍 Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambernath (E), Dist. Thane, Maharashtra, India — 421 506.,

✉ sales@flameproof.co.in

📞 9321160178

🌐 www.flameproof.co.in

Product Photos

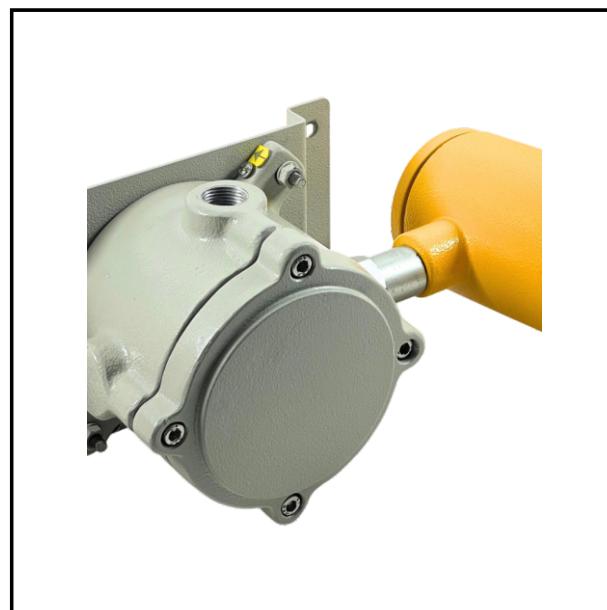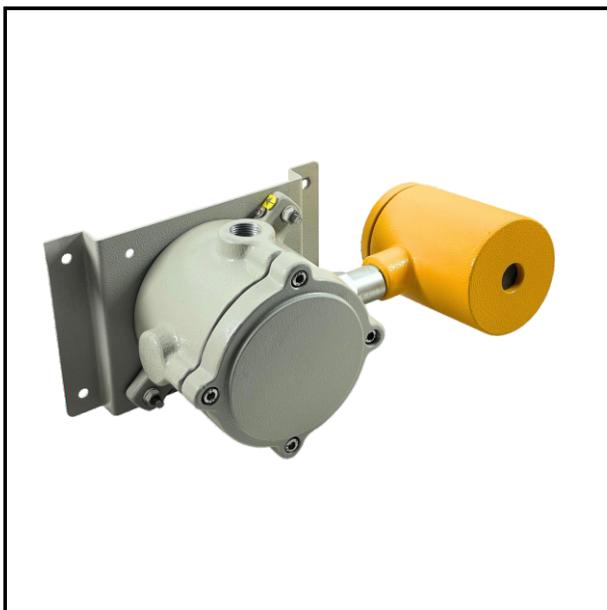

Flameproof Instrumentation

Made in 

Flameproof Instrumentation

📍 Plot. No. E/14, Addl. MIDC, Anand Nagar, Ambernath (E), Dist. Thane, Maharashtra, India — 421 506.,

✉️ sales@flameproof.co.in

📞 9321160178

🌐 www.flameproof.co.in